

Features and Characteristics

Alumilite offers a full line of Sea Turtle and Observatory Friendly luminaires that are produced from high grade aluminum and finished with Super Durable Polyester Powder. Amber LED modules meet the specifications of the Florida Wild Life Commission.



Housing: Heavy gauge cast aluminum housing is designed for recessed dry or concrete pour applications. Housing is provided with two wire entry holes. Specify 1/2" or 3/4" NPT. Neoprene gasket is installed between housing and face-plate.

Face-Plate: Rugged cast aluminum face-plate with 45° louvers, secures frosted tempered glass. Face-plate is secured to housing with two stainless, tamper proof fasteners. Optional with prismatic glass "PG".

LED/Module: Amber LED linear modules have a minimum wavelength of 583 nm. They are available in 8w/200lm or 14w/700lm. Drivers have Class 2 power, universal voltage and are IP 67 rated. LED module/driver have a 5-year limited warranty.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations, approved by the FWC. Certification #2018-034 and is (BABA) Build America, Buy America compliant.

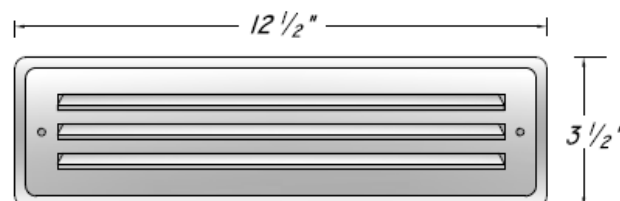

Specifications

Series	Wattage/Lamp	Volts
CT1	8w/ALED = 08/ALED	UV
CT1	14w/ALED = 14/ALED	UV

Options	Finish
PG = Prismatic Glass	BZ = Bronze
	BK = Black
	WH = White
	SL = Silver
	CC = Custom Color

Example

8 Watt, Amber LED, 120 Volts, Bronze
CT108/ALED/UV/BZ