

## Features and Characteristics

Alumilite offers a full line of Sea Turtle and Observatory Friendly luminaires that are produced from high grade aluminum and finished with Super Durable Polyester Powder. Amber LED modules meet the specifications of the Florida Wild Life Commission.



**Housing:** Heavy gauge cast aluminum housing is designed for recessed dry or concrete pour applications. Housing is provided with two wire entry holes. Specify either 1/2" or 3/4" NPT. Neoprene gasket is installed between housing and face-plate.

**Face Plate:** Rugged cast aluminum face-plate with vertical louvers and frosted glass lens. Face-plate is secured to housing with two recessed stainless steel tamper proof fasteners.

**LED/Module:** Amber LED linear modules have a minimum wavelength of 583 nm. They are available in 14w/700lm or 28w/1400lm. Drivers have Class 2 power, universal voltage and are IP 67 rated. LED module/driver has a 5-year limited warranty.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations and has been approved by the FWC. Certification #2018-034.

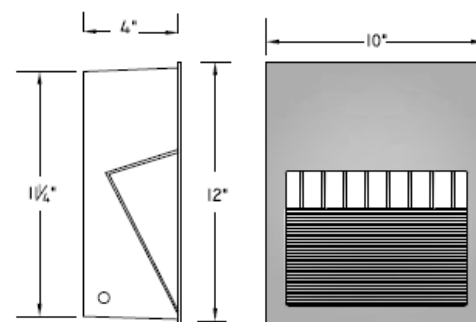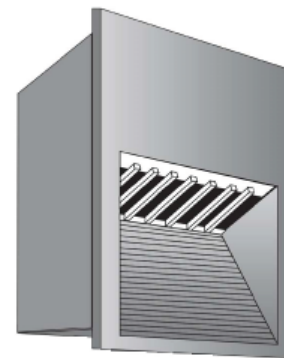

### Specifications

Series	Wattage/Lamp	Volts
CW1	14w/ALED = 14/ALED	UV
CW1	28w/ALED = 28/ALED	UV

Options	Finish
	BZ = Bronze
	BK = Black
	WH = White
	SL = Silver
	CC = Custom Color

### Example

14 Watt, Amber LED, 120 Volts, Bronze  
CW-114/ALED/UV/BZ