

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Enclosure: One piece 15" seamless high strength polycarbonate cube with rounded corners. Cubes are available in clear, smoke and bronze tints. All cubes are UV stabilized for longer life.


Fitter: Heavy duty cast aluminum holder provides strength and durability. Spring loaded retaining brackets secure enclosure to gasketed fitter. Internal stainless steel set screws secure assembly to 3" diameter tenon.

Optical System: Cylindrical Type 5 glass refractor is standard. Include "RF5" in part number when specifying.

Module/Driver: LED modules are TerraLux linear fully-integrated units with patented Thermal Management Technology to provide maximum light output at all times. Standard with universal voltage and 0-10v dimming. 16w/860lm, 26w/1300lm and 39w/1950lm modules are IP-65 rated and have a 5-year warranty. L70 = 60,000 hr.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

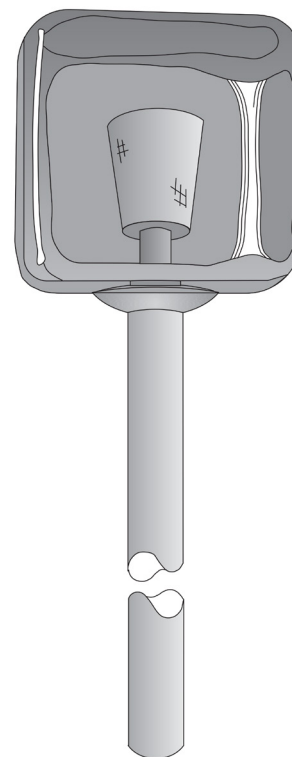

Specifications

Series	Size	Wattage/Lamp	Volts
CU	15"	16w/LED = 1516LED	UV
CU	15"	26w/LED = 1526LED	UV
CU	15"	39w/LED = 1539LED	UV

Tint	Options	Finish
C=Clear	RF5 = Refractor	BZ = Bronze
B=Bronze	WM = Wall Mount	BK = Black
S=Smoke	2A = Twin Pole Mount	WH = White
	30k = 3000k	SL = Silver
	35k = 3500k	CC = Custom Color
	40k = 4000k	

Example

15" Cube, 26 watt LED, 120 Volts, Clear, RF5, Wall Mount, 4000k, Black
CU1526/LED-UV/C/RF5/ WM/40k/BK