

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Enclosure:** One piece seamless polycarbonate sphere. Available in diameters from 14" to 20" and in clear, opal, smoke and bronze tints. All spheres are UV stabilized for longer life.


**Fitter:** Heavy duty cast aluminum holder provides strength and durability. Spring loaded retaining brackets secure enclosure to gasketed fitter. Internal stainless steel set screws secure assembly to 3" diameter tenon.

**Optical System:** Cylindrical Type 5 glass refractor is standard for use with all available enclosures except opal. Include "RF5" in the part number when specifying.

**Module/Driver:** LED modules are TerraLux linear fully-integrated units with patented Thermal Management Technology to provide maximum light output at all times. Standard with universal voltage and 0-10v dimming. 16w/860lm, 26w/1300lm and 39w/1950lm modules are IP-65 rated and have a 5-year warranty. L70 = 60,000 hr.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

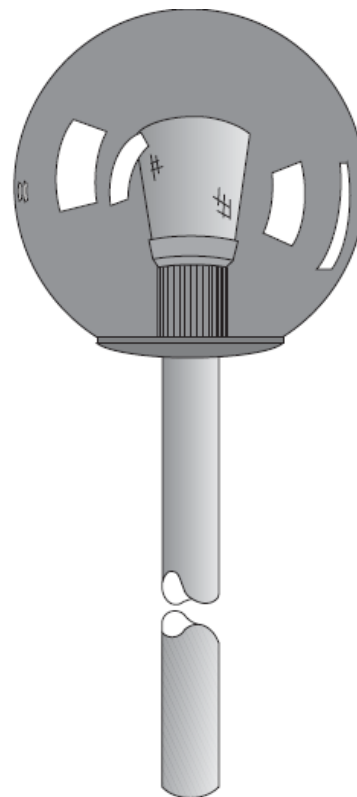

## Specifications

Series	Size	Wattage/Lamp	Volts
SP	14"	16w/LED = 16LED	UV
SP	16"	26w/LED = 26LED	UV
SP	18"	39w/LED = 39LED	UV
SP	20"	39w/LED = 39LED	UV

Tint	Options	Finish
O=Opal	RF5 = Refractor	BZ = Bronze
C=Clear	WM = Wall Mount	BK = Black
B=Bronze	30k = 3000k	WH = White
S=Smoke	3500k = 35k	SL = Silver
	4000k = 40k	CC = Custom Color

## Example

18" Sphere, 16 Watt, LED, 120 Volts, Clear, RF5, Wall Mount, 4000k, Black  
 SP1816/LED-UV/C/RF5/WM/40k/BK