

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: The spun aluminum shroud is supplied with a $\frac{3}{4}$ " threaded coupling for attachment to the arm bracket and driver compartment cover plate.


Enclosure: Clear tempered glass lens threads into cast aluminum adapter, which is mounted to the shroud. Cast aluminum guard is available upon request.

Module/Driver: Cree LED modules are incased in a cast aluminum housing and sealed with diffused dome lens. 9w/850 lm and 12w/1250 lm modules are available in 3000, 3500 and 4000k with a minimum CRI of 90. Drivers have 0-10v dimming and operate on 120 or 277 volts.

Driver Compartment: Driver mounts in the cast aluminum box with two fasteners. A steel zinc plated bracket bolts to the j-box or directly to the wall. The driver compartment bolts to the steel plate with three stainless steel fasteners.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

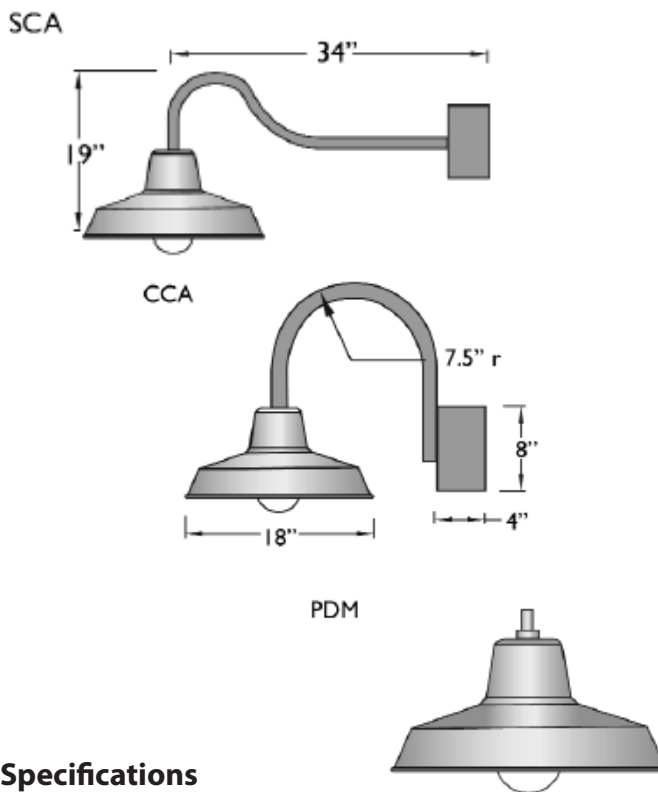

Specifications

Series	Wattage/Lamp	Volts
RLM-18	9w/LED = 09/LED	120
RLM-18	12w/LED = 12/LED	277

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
CG = Cast Guard	SL = Silver
PG = Prismatic Glass	CC = Custom Color
FG = Frosted Glass	
CCA = Candy Cane Arm	
SCA = Shepherd Crook	
PDM = Pendant Mount	

Example

12 Watt, LED, 120 Volts, Prismatic Glass, 3500k, Bronze
RLM1812/LED-120/PG/3500k/BZ