

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: A heavy duty aluminum shroud is welded to the extruded aluminum thorax and sealed to prevent water entry. The top cap seals driver compartment and it is secured with two stainless steel screws.


Dome Cap: The rugged hydroformed aluminum dome houses driver assembly.

Mounting Bracket: Extruded aluminum arm is internally welded to cast back plate. Arm is bolted to housing with two 3/8" bolts. A heavy duty steel zinc plated bracket mounts to the J-Box and wall surface and is attached to the inside of cast plate with two stainless steel fasteners. Direct mount to pole is optional. "PM"

Module/Driver: HPWinner LED Modules have high quality Lumiled LED's with an IP-68 rating and waterproof connectors. They are available in type 3, 4 and 5 distributions with 35w/4500lm or 55w/6100lm. Modules are available in 3000, 4000 and 5000k and have a minimum CRI of 80. Drivers are 0-10v dimming with universal voltage. Extruded aluminum heat sinking system provides optimal thermal management.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

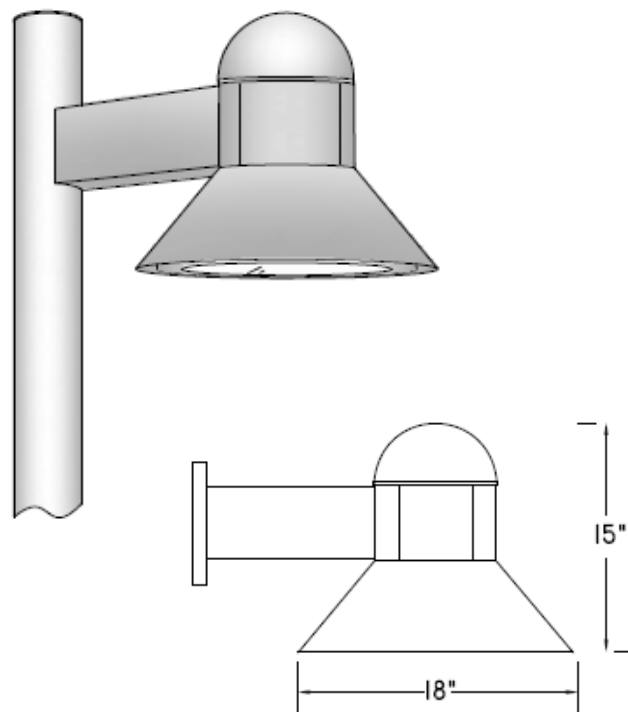

Specifications

Series	Wattage/Lamp	Volts
VK-17	35w/LED = 35/LED	UV
VK-17	55w/LED = 55/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
4000k = 40k	BK = Black
5000k = 50k	WH = White
PH = Photo Cell	SL = Silver
WM = Wall Mount	CC = Custom Color
PM = Pole Mount	
R3 = Type 3 R4 = Type 4	
R5 = Type 5	

Example

35 Watt, LED, 120 Volts, 3000k, Wall Mount/ Bronze
VK-1735/LED-UV/30k/WM/BZ