

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: A heavy duty spun aluminum shroud with three aluminum disks are provided with dome top cap. The shroud, disk and cap assembly are built as one unit for ease in installation.

Dome Cap: The rugged hydroformed aluminum cap with a hemispherical shape rests on the top disk. Cap is threaded to accept the pendant and sealed to prevent water entry when used outdoors.


Enclosure: A clear glass enclosure with threaded neck is provided as standard. Optional units can be ordered with inside sandblasted or with vertical prismatic ribs. The enclosure is secured to a threaded cast aluminum fitter which is mounted in the dome.

Pendant Assembly: Extruded aluminum pendant is threaded for secure fit to dome cap. Pendant is provided with swivel canopy and universal mounting bracket for bolting to J-Box. Pendant length must be specified when ordering.

Module/Driver: Cree LED modules are incased in a cast aluminum housing and sealed with diffused dome lens. They provide industry-leading efficacy of 97 lm/W for 12w/1250lm, 20w/2000lm and 30w/3000lm modules. They are available in 3000, 3500 and 4000k with a minimum CRI of 90. Drivers have 0-10v dimming. 20 and 30w drivers have universal voltage and 12 watt is 120 or 277 only.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

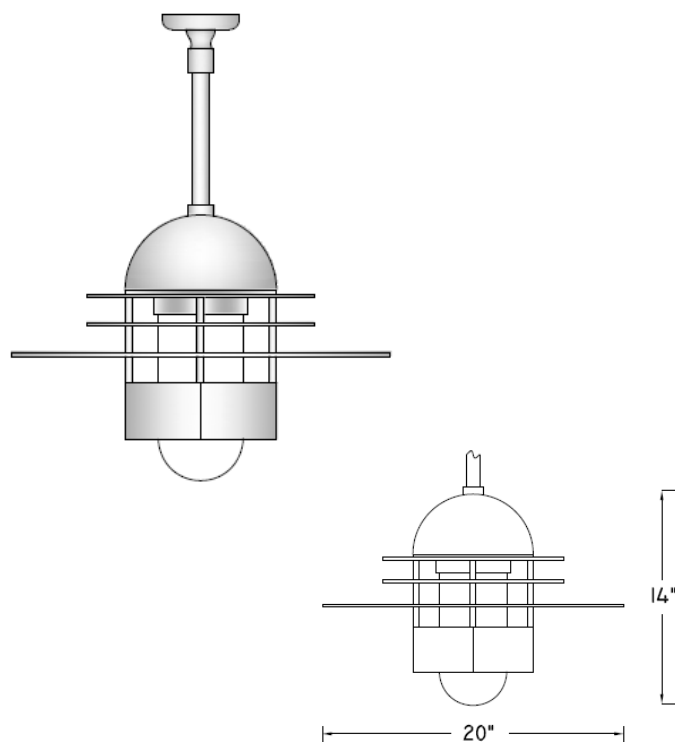

Specifications

Series	Wattage/Lamp	Volts
VK-19	12w/LED = 12/LED	120
VK-19	20w/LED = 20/LED	277
VK-19	30w/LED = 30/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
FG = Frosted Glass	SL = Silver
PG = Prismatic Glass	CC = Custom Color
WM = Wall Mount	

Example

20 Watt, LED, 120 Volts, Frosted Glass, 3500k, Bronze
VK-1920/LED-UV/FG/35k/BZ