

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: A heavy duty spun aluminum shroud with extruded aluminum tube inside cast disk assembly is secured to the dome cap with three internal tie rods.

Dome Cap: Cast aluminum dome houses driver and is secured to the arm with three stainless steel fasteners.



Lens Assembly: Clear tempered glass is sealed to the spun aluminum hinged door frame. Assembly is secured to the housing with three stainless steel fasteners.

Mounting Bracket: A 2" diameter extruded aluminum arm with 12" radius bend is welded to cast cover plate. Arm slips over tenon on dome cap and is secured with stainless steel fasteners. Heavy duty steel mounting plate bolts to the wall surface and is attached to cast cover on the arm with two flush stainless steel tamper resistant screws.

Module/Driver: HP Winner LED Modules have high quality Lumiled LED's with an IP-68 rating and waterproof connectors. They are available in type 3, 4 and 5 distributions with 35w/4500lm, 55w/6100lm, and 70w/9000lm. Modules are available in 3000, 4000 and 5000k and have a minimum CRI of 80. Drivers are 0-10v dimming with universal voltage. Extruded aluminum heat sinking system provides optimal thermal management.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

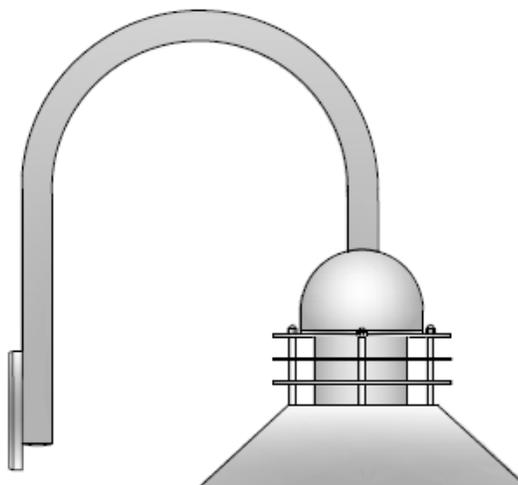

Specifications

Series	Wattage/Lamp	Volts
VK-23	35w/LED = 35/LED	UV
VK-23	55w/LED = 55/LED	UV
VK-23	70w/LED = 70/LED	UV

Options	Finish
WM = Wall Mount	BZ = Bronze
1A = Single Pole Mount	BK = Black
2A = Twin Pole Mount	WH = White
30k = 3000k R3 = Type 3	SL = Silver
40k = 4000k R4 = Type 4	CC = Custom Color
50k = 5000k R5 = Type 5	

Example

70 Watt LED, 120 Volts, Wall Mount, 5000k, Type 3, Bronze
VK-2370/LED-UV/WM/50k/R3/BZ