

VK 2400 LED Series



Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: A heavy duty spun aluminum shroud has a solid center section. Housing is secured to dome with three flush stainless steel screws.

Dome Cap: Cast aluminum dome is secured to housing and arm with stainless steel fasteners.


Lens Assembly: Clear tempered glass is sealed to the spun aluminum hinged door frame. Assembly is secured to the housing with three stainless steel screws.

Mounting Bracket: A 2" diameter extruded aluminum arm with 12" radius bend is welded to cast pole slipfitter. Arm slips over the tenon on pole and is secured with 3 stainless steel fasteners. For wall mounting, a heavy duty steel zinc plated bracket mounts to the J-Box and wall surface and is attached to the inside of cast plate with three stainless steel fasteners.

Module/Driver: HPWinner LED Modules have high quality Lumiled LED's with an IP-68 rating and waterproof connectors. They are available in type 3, 4 and 5 distributions with 35w/4500lm, 55w/6100lm, and 70w/9000lm. Modules are available in 3000, 4000 and 5000k and have a minimum CRI of 80. Drivers are 0-10v dimming with universal voltage. Extruded aluminum heat sinking system provides optimal thermal management.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaires are ETL listed for wet locations.

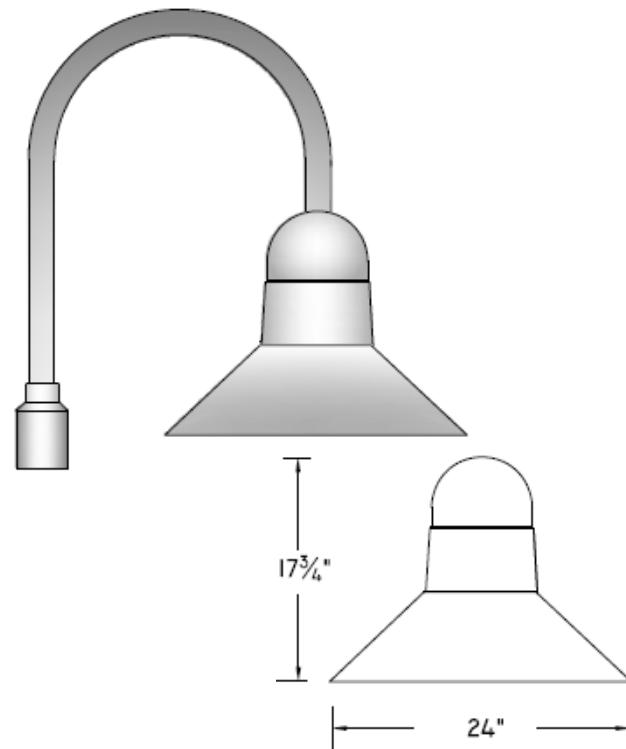

Specifications

Series	Wattage/Lamp	Volts
VK-24	35w/LED = 35/LED	UV
VK-24	55w/LED = 55/LED	UV
VK-24	70w/LED = 70/LED	UV

Options	Finish
WM = Wall Mount	BZ = Bronze
1CCA = Single Pole Mount	BK = Black
2CCA = Twin Pole Mount	WH = White
30k = 3000k	SL = Silver
40k = 4000k	CC = Custom Color
50k = 5000k	R5 = Type 5

Example

70 Watt LED, 120 Volts, Wall Mount, 5000k, Type 3, Bronze
VK-2470/LED-UV/WM/50k/R3/BZ