

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: The heavy gauge spun aluminum shroud is secured to the assembly with three internal tie rods.

Dome Assembly: Top cast aluminum dome is secured to the cast ring with a single flush stainless steel fastener. The decorative vertical frame is secured to bottom dome with three internal tie rods.


Enclosure: Opal acrylic enclosure is sealed between top and bottom domes and is gasketed to prevent moisture or insect entry. Lens produces a smooth symmetrical distribution.

Slip Fitter: Extruded aluminum fitter is internally welded to dome and is secured to tenon with (3) stainless steel fasteners. Standard pole tenon should be 2-3/8" diameter.

Module/Driver: Cree LED modules are incased in a cast aluminum housing and sealed with diffused dome lens. They provide industry-leading efficacy fo 97 lm/W for the 20w/2000lm and 30w/30000lm modules. They are available in 3000, 3500 and 4000k with a minimum CRI of 90. Drivers have universal voltage and 0-10v dimming.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

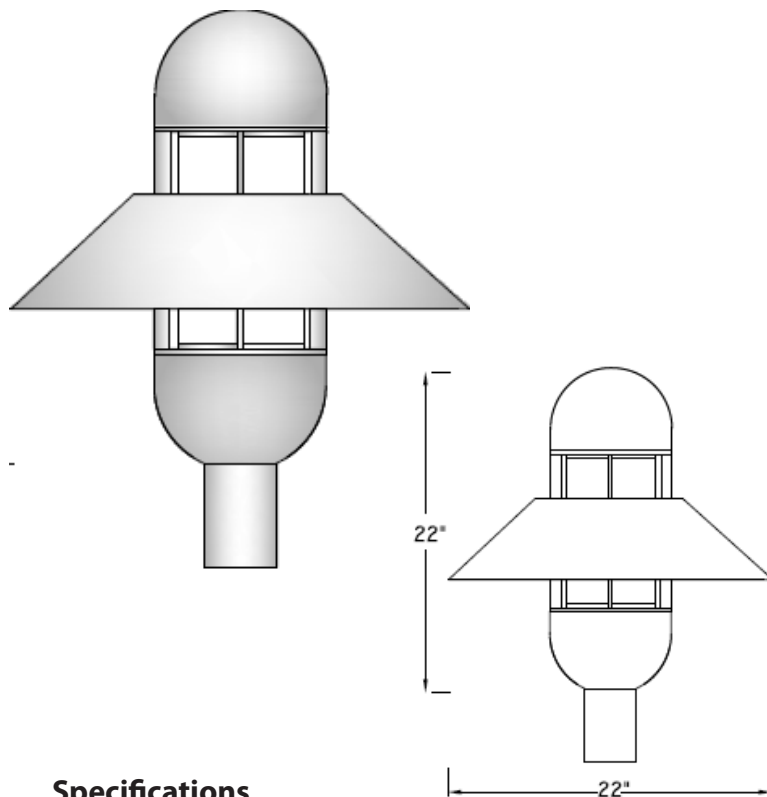

Specifications

Series	Wattage/Lamp	Volts
VK-8	20w/LED = 20/LED	UV
VK-8	30w/LED = 30/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
PH = Photo Cell	SL = Silver
WM = Wall Mount	CC = Custom Color
PDM = Pendant Mount	

Example

20 Watt, LED, 120 Volts, Wall Mount, 3500k, Bronze
VK-820/LED-UV/WM/35k/BZ