

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: The heavy duty spun aluminum shroud with three aluminum disks are provided with dome top cap. The shroud, disk and cap assembly are built as one unit for ease in installation.

Dome Cap: Cast aluminum cap with a hemispherical shape rests on the top disk. Cap is threaded to accept the pendant and sealed to prevent water entry when used outdoors.

Disk Assembly: Three heavy gauge cast aluminum disks are secured in position with three satin aluminum spacers and internal tie rods.


Enclosure: A clear glass enclosure with threaded neck is provided as standard. Optional units can be ordered with outside sandblasted or with vertical prismatic ribs. The enclosure is secured to a threaded cast aluminum fitter which is mounted in the dome.

Pendant Assembly: Extruded aluminum pendant is threaded for secure fit to dome cap. Pendant is provided with swivel canopy and universal mounting bracket for bolting to J-Box. Pendant length must be specified when ordering.

Module/Driver: Cree LED modules are incased in a cast aluminum housing with diffused dome lens. 12w/1250lm, 20w/2000lm and 30w/3000 lumen modules are available in 3000, 3500 and 4000k with a minimum CRI of 90. Drivers are 0-10v dimming with universal voltage except the 12 watt, which are 120 or 277. Extruded aluminum heat sinking system provides optimal thermal management.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

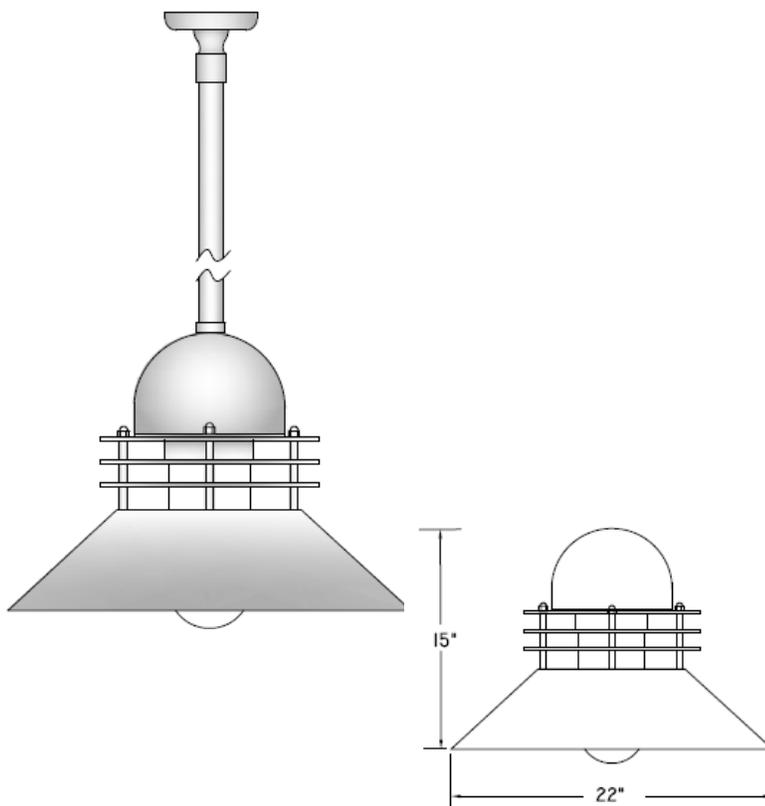

Specifications

Series	Wattage/Lamp	Volts
VK-9	12w/LED = 12/LED	120
VK-9	20w/LED = 20/LED	277
VK-9	30w/LED = 30/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
CG = Cast Guard	SL = Silver
PG = Prismatic Glass	CC = Custom Color
FG = Frosted Glass	
PM = Pole Mount	
WM = Wall Mount	

Example

20 Watt, LED, 120 Volts, Frosted Glass, 3500k, Bronze
VK-920/LED-UV/FG/35k/BZ