

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Top Cap: Aluminum top cap is easily removed to access the module. Cap is gasketed and secured to the lens assembly with one flush stainless steel screw.

Enclosure: Clear acrylic enclosure is sealed to the top cap and the shaft to prevent the entry of moisture, insects and dust. Internal glass refractor is standard with type 5 distribution. Optional with type 3 distribution "RF3". House shields available in 90 or 180 degrees.

Shaft Construction: Four extruded aluminum interlocking sections form the 8" square shaft. Two sections are welded to lens assembly. The upper section slides up to access anchor bolts and the power supply. Available in different heights.

Anchor Base: Heavy duty cast aluminum base is provided with three 3/8"x 8" plated anchor bolts.


Module/Driver: Cree modules are incased in a cast aluminum housing and sealed with diffused lens. 20w/2000lm, 30w/3000lm and 40w/4000lm modules are available in 3000, 3500 and 4000k. Drivers are universal voltage with 0-10v dimming. Optional with emergency driver "EMD".

Finish: Polyester powder coating baked on finish.

Listing: Luminaire is ETL listed for wet locations.

Specifications

Series	Wattage/Lamp	Volts	Height
AB-CR	20w/LED = 820/LED	UV	24"
AB-CR	30w/LED = 830/LED	UV	30"
AB-CR	40w/LED = 840/LED	UV	36"
			42"
			48"

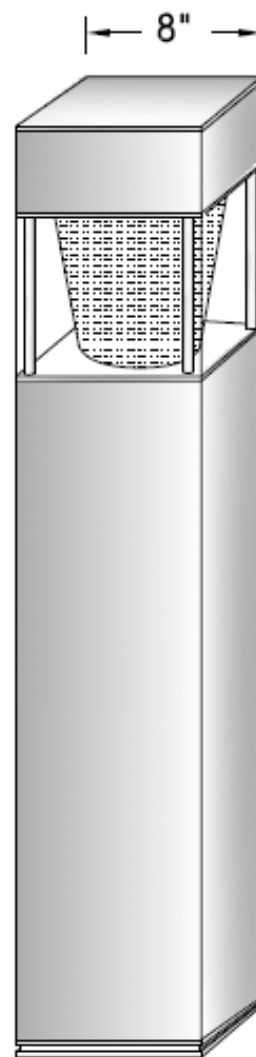

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
PH = Button Cell	SL = Silver
SP = 10kv Surge Protector	CC = Custom Color
9HS = 90° Shield	
18HS = 180° Shield	
EMD = Emerg. Driver	
RF3 = Type 3 Refractor	

Example

40 Watt, LED, 120 Volts, 24" Tall, 3500k, Bronze
 AB-CR-840/LED-UV/24"/35k/BZ