

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Top Cap:** Aluminum cap is secured to louver assembly with one flush stainless tamper resistant fastener.

**Louvers:** Spun aluminum louver assembly is secured with three internal tie rods.

**Shaft Construction:** Four heavy gauge .188 wall extruded aluminum interlocking sections form the bollard shaft. Two sections are internally welded to base plate and two sections are welded at louver assembly. The upper section can slide up to access anchor bolts.

**Base Plate:** Heavy duty cast aluminum base is provided with three (3) 3/8" x 8" zinc plated anchor bolts, nuts and washers.


**Module/Driver:** LED modules are Terralux linear fully-integrated with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated and have universal voltage and 0-10v dimming drivers. 16w/860lm, 26w/1300lm, 30w/1720lm 39w/1950 lm and 45w/2580 lm modules are available in 3000, 3500 and 4000k. House side shields are optional in 90° "9HS" and 180° "18HS".

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

### Specifications

| Series | Wattage/Lamp       | Volts | Height |
|--------|--------------------|-------|--------|
| FB     | 16w/LED = 1216/LED | UV    | 24"    |
| FB     | 26w/LED = 1226/LED | UV    | 30"    |
| FB     | 30w/LED = 1230/LED | UV    | 36"    |
| FB     | 39w/LED = 1239/LED | UV    | 42"    |
| FB     | 45w/LED = 1245/LED | UV    | 48"    |

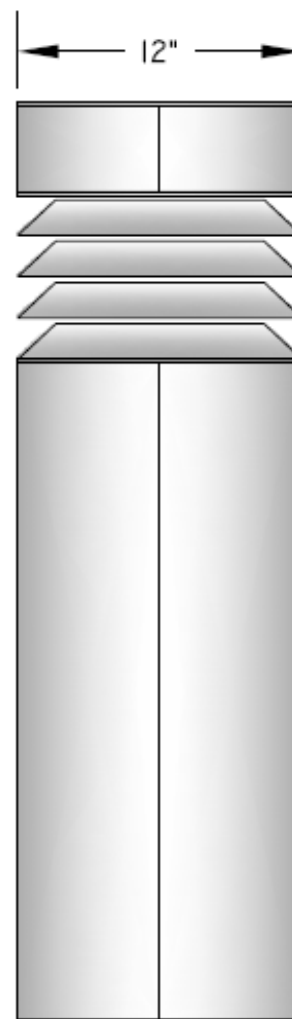

| Options                  | Finish            |
|--------------------------|-------------------|
| 3000k = 30k              | BZ = Bronze       |
| 3500k = 35k              | BK = Black        |
| 4000k = 40k              | WH = White        |
| PH = Button Cell         | SL = Silver       |
| SP = 10kvSurge Protector | CC = Custom Color |
| 9HS = 90° Shield         |                   |
| 18HS = 180° Shield       |                   |

### Example

30 Watt, LED, 120 Volts, 24" Tall, 3000k, Bronze  
 FB-1230/LED-UV/24"/30k/BZ