

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Top Cap: Aluminum cap is secured to louver assembly with single flush stainless tamper resistant fastener.

Cast Louvers: Cast aluminum louver assembly is secured to the shaft with three (3) stainless steel internal tie rods.

Shaft Construction: Four heavy gauge .188 wall extruded aluminum interlocking sections form the bollard shaft. Two sections are internally welded to base plate and two sections are welded at louver assembly. The upper section can slide up to access anchor bolts.

Base Plate: Heavy duty cast aluminum base is provided with three (3) 3/8" x 8" zinc plated anchor bolts, nuts and washers.


Module/Driver: LED modules are TerraLux linear fully-integrated with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated and have universal voltage and 0-10v dimming. 16w/860lm, 26w/1300lm, 30w/1720lm, 39w/1950lm and 45w/2580lm modules are available in 3000, 3500 and 4000k. House side shields are optional for 90° "9HS" and 180° "18HS".

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

Specifications

Series	Wattage/Lamp	Volts	Height
FB	16w/LED = 816/LED	UV	24"
FB	26w/LED = 826/LED	UV	30"
FB	30w/LED = 830/LED	UV	36"
FB	39w/LED = 839/LED	UV	42"
FB	45w/LED = 845/LED	UV	48"

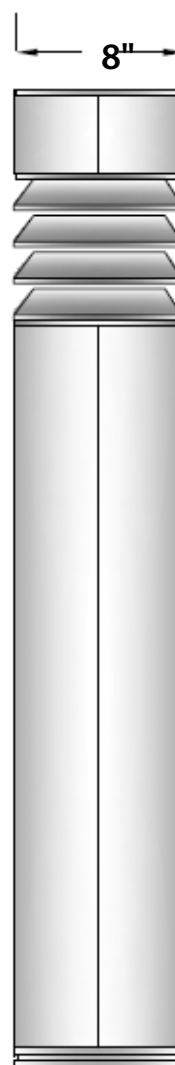

Options

Finish

3000k = 30k

BZ = Bronze

3500k = 35k

BK = Black

4000k = 40k

WH = White

PH = Button Cell

SL = Silver

SP = 10kv Surge Protector

CC = Custom Color

9HS = 90° Shield

18HS = 180° Shield

Example

30 Watt, LED, 120 Volts, 24" Tall, 3000k, Bronze
FB-830/LED-UV/24"/30k/BZ