

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Top Cap:** Cast aluminum lid is easily removed to access the module. Cap is gasketed and secured to the lens assembly with single flush stainless steel tamper resistant fastener.

**Enclosure:** Clear acrylic enclosure is sealed to the top cap and the shaft. Internal satin conical reflector produces smooth symmetric distribution. Optional with 90 or 180° shield "HS9/HS18".

**Shaft Construction:** Four extruded aluminum interlocking sections form the bollard shaft. Two sections are welded to lens assembly. The upper section slides up to access anchor bolts and the driver.

**Anchor Base:** Heavy duty cast aluminum base is provided with three 3/8"x 8" plated anchor bolts, nuts and washers.


**Module/Driver:** Cree modules are incased in a cast aluminum housing and sealed with diffused lens. 20w/2000lm, 30w/3000lm and 40w/4000lm modules are available in 3000, 3500 and 4000k. Drivers have universal voltage and 0-10v dimming. Optional with emergency driver "EMD".

**Finish:** Polyester powder coating baked on finish.

**Listing:** Luminaire is ETL listed for wet locations.

### Specifications

Series	Wattage/Lamp	Volts	Height
FB-CR	20w/LED = 820/LED	UV	24"
FB-CR	30w/LED = 830/LED	UV	30"
FB-CR	40w/LED = 840/LED	UV	36"
			42"
			48"

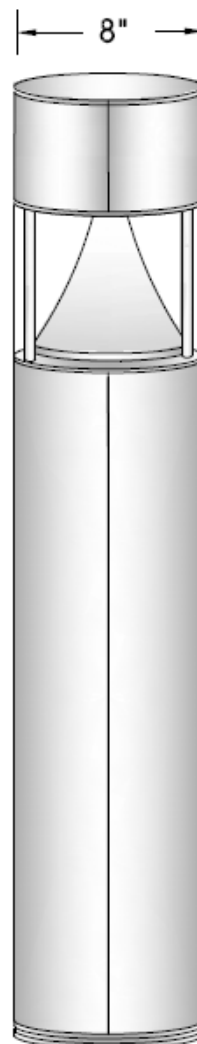

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
SP = 10kv Surge Protector	SL = Silver
EMD = Emergency Driver	CC = Custom Color
HS9 = 90° Shield	
HS18 = 180° Shield	

### Example

40 Watt, LED, 120 Volts, 42" Tall, 4000k, Bronze  
 FB-CR-840/LED-UV/42"/40k/BZ