

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Top Cap:** Cast aluminum dome is secured to disk assembly with single flush stainless steel tamper resistant fastener.

**Disk Assembly :** Three heavy aluminum disks and glare shield are secured in position with three aluminum spacers and internal tie rods.

**Shaft Construction:** Four heavy gauge .188 wall extruded aluminum interlocking sections form the bollard shaft. Two sections are internally welded to base plate and two sections are welded at louver assembly. The upper section can slide up to access anchor bolts.

**Base Plate:** Heavy duty cast aluminum base is provided with three (3) 3/8" X 8" zinc plated anchor bolts, nuts and washers.


**Module/Driver:** LED modules are TerraLux linear fully-integrated with with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated with universal voltage and 0-10v dimming. Modules are available in 16w/860lm, 26w/1300 lm, 30w/1720lm, 39w/1950lm and 45w/2580lm. Available in 3000, 3500 and 4500k. House side shields are available in 90 "9HS" or 180° "18HS".

**Finish:** Polyester powder coating on all metal parts.

**Listing:** Luminaire is ETL listed for wet locations.

### Specifications

Series	Wattage/Lamp	Volts	Height
HB	16w/LED = 816/LED	UV	24"
HB	26w/LED = 826/LED	UV	30"
HB	30w/LED = 830/LED	UV	36"
HB	39w/LED = 839/LED	UV	42"
HB	45w/LED = 845/LED	UV	48"

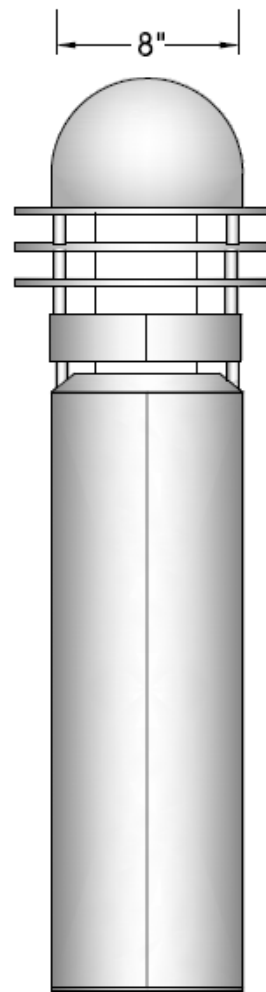

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
SP = 10kv Surge Protector	SL = Silver
PH = Bottom Cell	CC = Custom Color
HS9 = 90° Shield	
HS18 = 180° Shield	

### Example

26 Watt, LED, 120 Volts, 24" Tall, 3500k, Bronze  
HB-826/LED-UV/24"/35k/BZ