

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Top Cap: Cast aluminum cap is secured to lens assembly with two flush stainless steel tamper resistant fasteners.

Lens/Reflector: Clear acrylic lens with satin aluminum reflector system produces a smooth symmetric distribution. Three cast disks are secured to the assembly with 3 internal tie rods.


Shaft Construction: Heavy gauge extruded aluminum tube is secured to base and lens assembly with flush stainless steel fasteners.

Base Plate: Heavy duty cast aluminum base is provided with three (3) 3/8" X 8" zinc plated anchor bolts, nuts and washers.

Module/Driver: TerraLux LED modules are linear fully-integrated with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated with universal voltage and 0-10v dimming. Modules are available in 16w/860lm, 26w/1300lm or 30w/1720lm in 3000, 3500 and 4500k. House side shields are optional in 90° "9HS" or 180° "18HS".

Finish: Polyester powder coating on all metal parts.

Listing: Luminaire is ETL listed for wet locations.

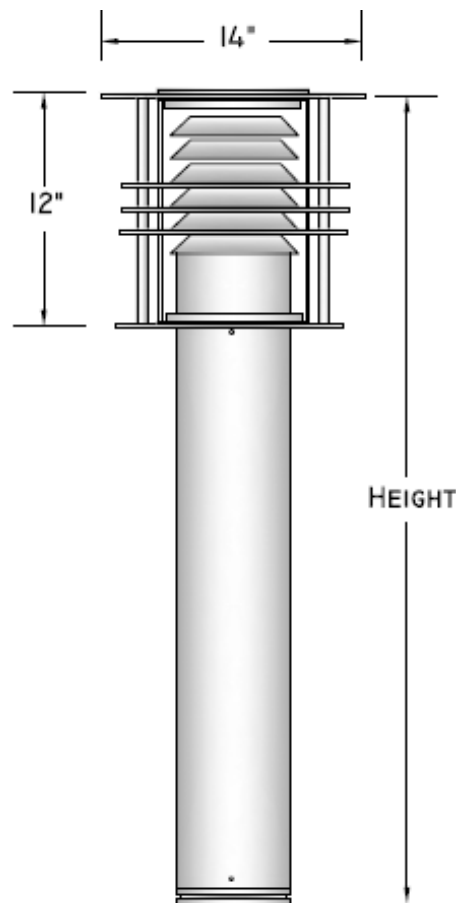

Specifications

Series	Wattage/Lamp	Volts	Height
VB-6	16w/LED = 16/LED	UV	24"
VB-6	26w/LED = 26/LED	UV	30"
VB-6	30w/LED = 30/LED	UV	36"
			42"
			48"

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
SP = 10kv Surge Protector	SL = Silver
PH = Button Cell	CC = Custom Color
HS9 = 90° Shield	
HS18 = 180° Shield	

Example

26 Watt, LED, 120 Volts, 24" Tall, 3500k, Bronze
 VB-626/LED-UV/24"/35k/BZ