

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Housing:** Extruded aluminum tube with internally welded cast top plate, mounts directly to J-Box or ceiling with a universal bracket. Luminaire is designed for interior or exterior applications.

**Pendant Assembly:** Extruded aluminum pendant is threaded for secure fit to housing lid. It is provided with a swivel canopy and universal bracket for mounting to J-Box. Pendant length must be specified when ordering.


**Lens Assembly:** Clear heat tempered glass lens is sealed in regressed cast aluminum frame which is gasketed and secured to the housing with three flush stainless steel set screws.

**Optical System:** Spun aluminum reflector with semi-specular finish produces a smooth symmetrical distribution.

**Module/Driver:** Cree LED modules are incased in a cast aluminum housing and sealed with diffused lens. They provide industry-leading efficacy of 97 lm/W for 9w/850 lm, 12w/1250 lm and 20w/2000 lm. Modules are available in 3000, 3500 and 4000k and have a minimum CRI of 90. Drivers have 0-10v dimming. 20 watt has universal voltage. 9 and 12 watt are either 120 or 277 volts. Extruded aluminum heat sinking system provides optimal thermal management.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

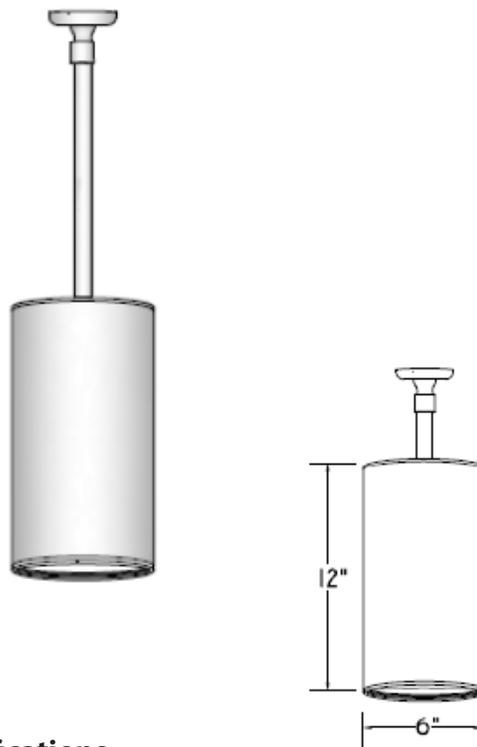

## Specifications

Series	Wattage/Lamp	Volts
YRP	9w/LED = 609/LED	120
YRP	12w/LED = 612/LED	277
YRP	20w/LED = 620/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
PG = Prismatic Glass	SL = Silver
OB = Open Bottom	CC = Custom Color
ACC = Air Craft Cable	

## Example

20 Watt, LED, 120 Volts, 3000k, Bronze  
YRP-620/LED-UV/30k/BZ