

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Housing:** Heavy gauge aluminum housing is internally welded and sealed to prevent water entry or light leaks. If luminaire is to be mounted down specify with "DM".

**Lens Frame:** Aluminum frame overlaps the housing and is secured with two stainless steel tamperproof fasteners. Down mount frame is secured inside of the housing and is gasketed to prevent insect entry.



**Lens:** Clear heat tempered glass is sealed in the frame and secured with two clips. Optional with frosted glass "FG".

**Module/Driver:** LED module is a TerraLux linear fully-integrated unit with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated with universal voltage and 0-10v dimming. 8w/430lm, 13w/700lm and 15w/860lm modules are available in 3000, 3500 and 4000k.

**Mounting Bracket:** Housing is secured to mounting plate with two internal nuts. Mounting plate bolts to standard 4" outlet box. Mounting hardware provided with fixture. J-box is provided by installer.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations

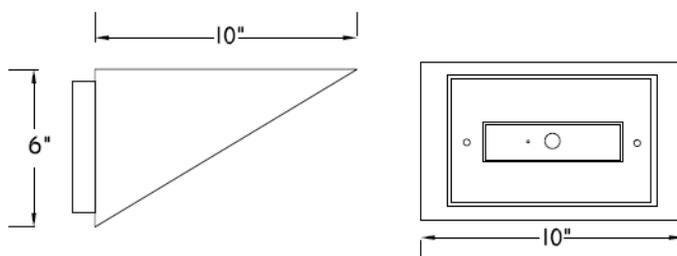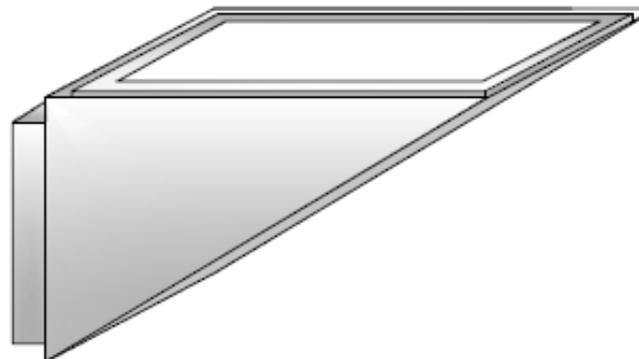

## Specifications

Series	Wattage/Lamp	Volts
SB1	8w/LED = 08/LED	UV
SB1	13w/LED = 13/LED	UV
SB1	15w/LED = 15/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
FG = Frosted Glass	SL = Silver
DM = Down Mount	CC = Custom Color
PH = Photo Cell	

## Example

13 Watt, LED, 120 Volt, 3500k, Down Mount, Bronze  
SB-113/LED-UV/35k/DM/BZ