

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: Formed from 3003-H14 extruded aluminum to provided excellent durability in harsh environments. Lens frame is internally welded in place. Housing is secured to the mounting plate with (4) stainless steel fasteners.




Lens Frame: Clear tempered glass is secured in the housing with three (3) retaining clips. Spread lens is supplied for wide throw distribution. Optional with frosted glass "FG". Up Mount "UM" is an option.

Mounting Plate: Heavy gauge .125 wall aluminum plate bolts to the wall. Module and driver assembly are attached to the mounting plate.

Modules/Driver: HPWinner LED Modules have high quality Lumiled LED's with an IP-68 rating and waterproof connectors. They are available in type 3 and type 4 distributions with 35w/4500lm or 55w/6100lm. Modules are available in 3000, 4000 and 5000k and have a minimum CRI of 80. Drivers are 0-10v dimming with universal voltage. Extruded aluminum heat sinking system provides optimal thermal management.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations

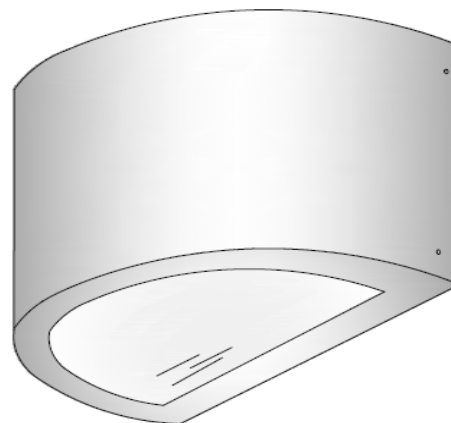

Specifications

Series	Wattage/Lamp	Volts
SK 1	35w/LED = 35/LED	UV
SK 1	55w/LED = 55/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
4000k = 40k	BK = Black
5000k = 50k	WH = White
R3 = Type 3 Distribution	SL = Silver
R4 = Type 4 Distribution	CC = Custom Color
FG = Frosted Glass	
UM = Up Mount	
PH = Photo Cell	

Example

35Watt, LED, 120 Volts, 3500k, Type 4, Bronze
SK-135LED-UV/35k/R4/BZ