

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: Three heavy gauge (.188) extruded aluminum sections are welded to cast aluminum end caps to form lamp housing.



Lens Frame: Extruded aluminum door frame houses 3/16" clear tempered glass. Gasketed frame is secured to housing with stainless steel tamper resistant fasteners. Optional with frosted glass "FG".

Module/Driver: HPWinner modules have high quality Lumiled LED's with an IP-68 rating and waterproof connectors. They are available in type 3 and type 4 distributions with 35w/4500lm or 55w/6100lm. Modules are available in 3000, 4000 and 5000k. Drivers are 0-10v dimming with universal voltage. Extruded aluminum heat sinking system provides optimal thermal management.

Mounting Bracket: Heavy gauge yoke bracket secures lamp housing with two flat head screws, which allows vertical aiming. Bracket is secured to wall with (4) bolts provided by contractor.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations

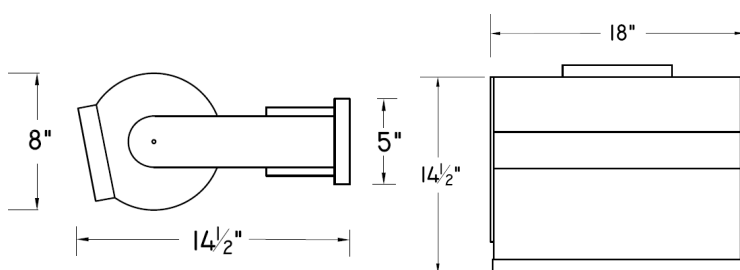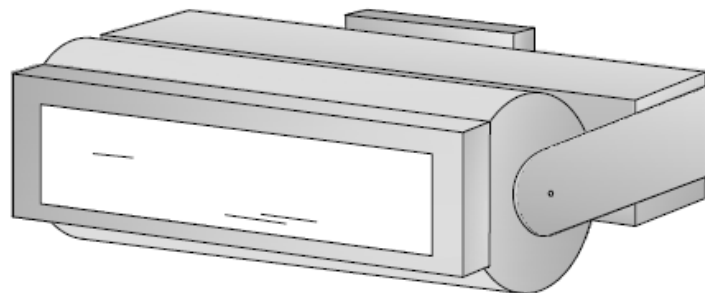

Specifications

Series	Wattage/Lamp	Volts
ST 1	35w/LED = 35/LED	UV
ST 1	55w/LED = 55/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
4000k = 40k	BK = Black
5000k = 50k	WH = White
PH = Photo Cell	SL = Silver
FG = Frosted Glass	CC = Custom Color
R3 = Type 3	
R4 = Type 4	

Example

55Watt, LED, 120 Volts, 3500k, Type 3, Bronze
ST-155LED-UV/35k/R3/BZ