

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: Heavy gauge aluminum housing is internally welded and sealed to prevent water entry or light leaks. Housing is bolted directly to the wall.



Lens Frame: Cleat tempered glass is sealed to cast aluminum frame which is secured to the housing with two stainless steel tamper resistant fasteners.

Mounting Plate: Heavy gauge .125 wall aluminum plate bolts to the wall. Housing is attached to the plate.

Module/Driver: LED module is a TerraLux linear fully-integrated unit with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated with universal voltage and 0-10v dimming. 13w/700lm and 15w/860lm modules are available in 3000, 3500 and 4000k.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations

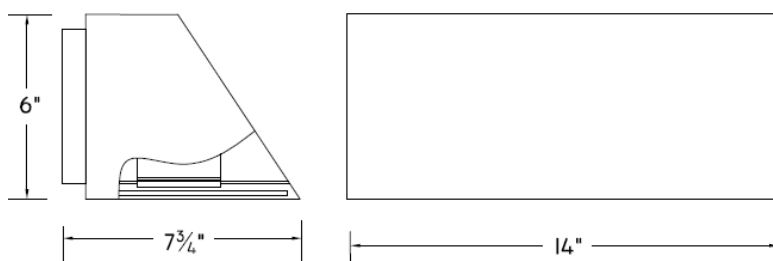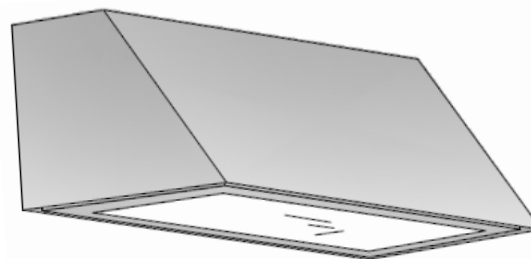

Specifications

Series	Wattage/Lamp	Volts
SV 3	13w/LED = 13/LED	UV
SV 3	15w/LED = 15/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
FG = Frosted Glass	SL = Silver
PH = Photo Cell	CC = Custom Color

Example

15Watt, LED, 120 Volts, 3500k, Bronze
SV-315/LED-UV/35k/BZ