

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: Heavy duty aluminum housing is internally welded and sealed. Extruded aluminum channel is welded to back of the housing which bolts directly to the wall.

Lens Frame: Formed from extruded aluminum, the frame rests on gasketed support frame in housing. Lens frame is secured to the housing with three stainless steel tamper proof fasteners.



Lens: A clear heat tempered glass lens is sealed in the frame. Optional with frosted glass "FG".

Module/Driver: HPWinner LED Modules have high quality Lumiled LED's with an IP-68 rating and waterproof connectors. They are available in type 3 and type 4 distributions with 35w/4500lm or 55w/6100lm. Modules are available in 3000, 4000 and 5000k and have a minimum CRI of 80. Drivers are 0-10v dimming with universal voltage. Extruded aluminum heat sinking system provides optimal thermal management.

Mounting Bracket: Housing bolts directly to the wall. Unit should be sealed at wall when used outdoors.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations

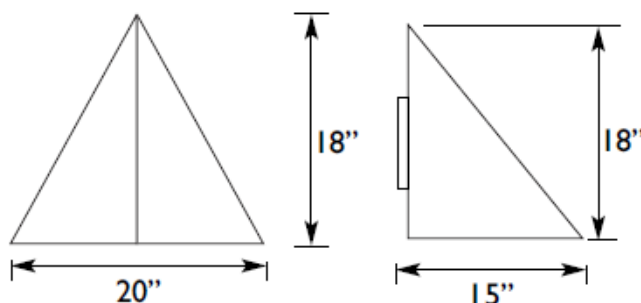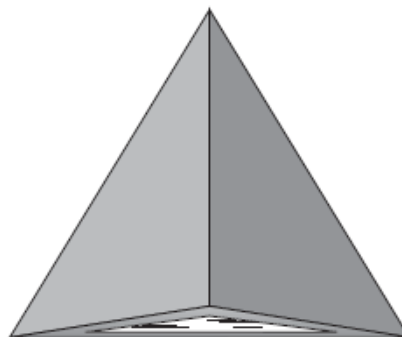

Specifications

Series	Wattage/Lamp	Volts
SW1	35w/LED = 35/LED	UV
SW1	55w/LED = 55/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
4000k = 40k	BK = Black
5000k = 50k	WH = White
FG = Frosted Glass	SL = Silver
PH = Photo Cell	CC = Custom Color
R3 = Type 3	
R4 = Type 4	

Example

35Watt, LED, 120 Volts, 3500k, Type 3, Bronze
SW-135LED-UV/35k/R3/BZ