

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.



Housing/Accent Bands: Heavy duty aluminum housing with upper and lower accent bands is secured to the wall with two bolts. (Bolts supplied by installer.) Accent bands are available in a different color than the main housing. Specify color of bands if different from housing. For a laser cut logo in the housing, contact a factory representative.

Lens Assembly: Prismatic tempered glass enclosure is standard. Threaded adapter secures the glass and is attached to the housing.

Module/Driver: LED modules are TerraLux linear fully-integrated with patented Thermal Management Technology to provide maximum light output at all times. Modules are IP-65 rated with universal voltage and 0-10v dimming. Provided with (2) 13w/700 lm or (2) 15w 860 lm modules in 3000, 3500 or 4000k.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

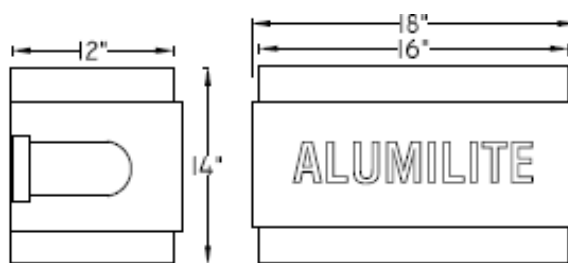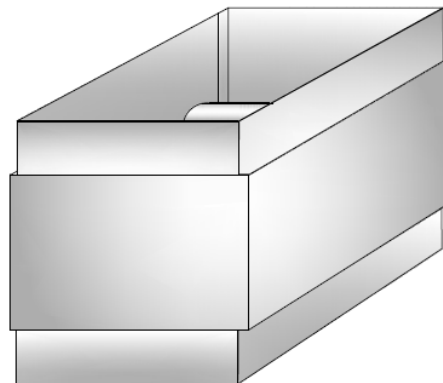

Specifications

Series	Wattage/Lamp	Volts
SZ1	26w/LED = 26/LED	UV
SZ1	30w/LED = 30/LED	UV

Options	Finish
3000k = 30k	BZ = Bronze
3500k = 35k	BK = Black
4000k = 40k	WH = White
CL = Custom Logo	SL = Silver
	CC = Custom Color

Example

30 Watt, LED, 120 Volts, 3500k, Bronze
 SZ-130w/LED-UV/35k/BZ