

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.



Housing: 18 gauge steel housing is designed for recessed dry or concrete pour applications. Housing is provided with two 1/2" conduit entry holes.

Face Plate: Rugged aluminum louvered face-plate is secured to housing with two stainless steel tamper proof fasteners. Optional with open face plate and frosted lens "OFP".

Module/Driver: TerraLux LED modules with opal lens are linear fully-integrated with universal voltage and 0-10v dimming. 8 watt produces 400 lumens and 13 watt 700 lm. Available in 2700, 3000, 3500 and 4000k.

Finish: Polyester powder coating on all metal parts. Color to be specified. Color to be specified.

Listing: Luminaire is ETL listed for dry locations.

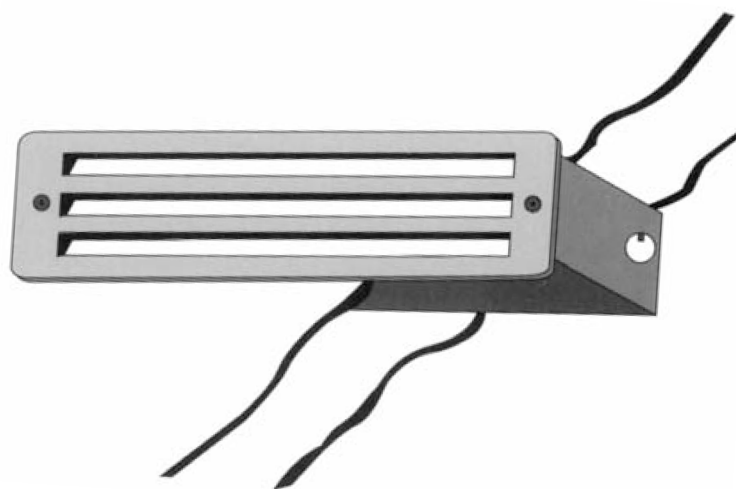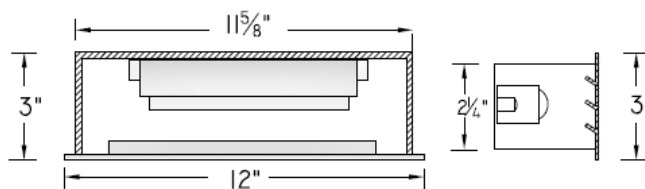

Specifications

Series	Wattage/Lamp	Volts
CT	8w/LED=108/LED	UV 120-277
CT	13w/LED=113/LED	UV 120-277

Options	Finish
OFP = Open faceplate & frosted lens	BZ = Bronze
27k = 2700k	BK = Black
30k = 3000k	WH = White
35k = 3500k	SL = Silver
40k = 4000k	

Example

8 Watt, LED, 120 Volts, 3000k, Black
CT108/LED-UV/30k/BZ