

Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

Housing: Heavy gauge cast aluminum housing is designed for recessed dry or concrete pour applications. Splice box is provided with two wire entry holes. Specify either 1/2" or 3/4" NPT. Neoprene gasket is installed between housing and face-plate.

Face Plate: Rugged cast aluminum face-plate with vertical louvers over clear glass lens. Face-plate is secured to housing with two recessed stainless steel tamperproof fasteners.



Module/Driver: LED module is a TerraLux linear fully integrated unit with patented Thermal Management Technology to provide maximum light output at all times. Drivers are 0-10v dimming with Universal Voltage 120-277. Modules are IP-65 rated and have a 5-year warranty. L70 = 60,000hr.

Characteristics:

Color	Watts	Lumens	Efficacy (lm/W)
2700k	8/13/15	390/575/725	49/50/56
3000k	8/13/15	430/650/800	54/57/62
3500k	8/13/15	430/650/800	54/57/59
4000k	8/13/15	459/700/860	57/61/66

Finish: Polyester powder coating on all metal parts. Color to be specified. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

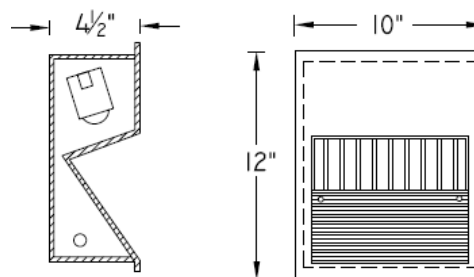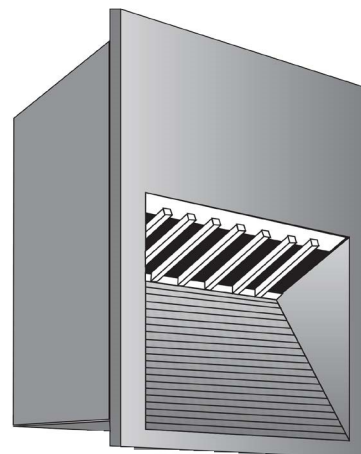

Specifications

Series	Wattage/Lamp	Volts
CW	8w/LED=108/LED	UV 120-277
CW	13w/LED=113/LED	UV 120-277
CW	15w/LED=115/LED	UV 120-277

Options	Finish
27k = 2700k	BZ = Bronze
30k = 3000k	BK = Black
35k = 3500k	WH = White
40k = 4000k	SL = Silver
	CC = Custom Color

Example

8 Watt, 120 Volts, 3000k, Black
CW108/LED-UV/30k/BK