

## Design Features

**Housing:** A heavy duty aluminum shroud is sealed to prevent water entry. The top cap covers ballast compartment and is secured with three stainless steel flat head screws.

**Dome Cap:** The rugged hydroformed aluminum dome houses ballast assembly and is secured to the arm with stainless steel hardware.


**Enclosure:** Clear vertically ribbed prismatic acrylic lens is available in Type III or V distributions. Assembly is provided with faceted one-piece reflector. Optional with a polycarbonate lens.

**Pole/Bracket Assembly:** Extruded aluminum pipe is welded to decorative cast aluminum base. Bracket is produced as one unit with heavy duty aluminum scrolls and finial welded to aluminum arm. Assembly is secured to pole with stainless steel fasteners.

**Ballast/Lamp Assembly:** All ballast shall be high power factor and suitable for -20° operation. The ballast is mounted in the dome and is secured with two screws. Lamp socket shall be porcelain, medium pulse-rated and mounted to the shroud.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

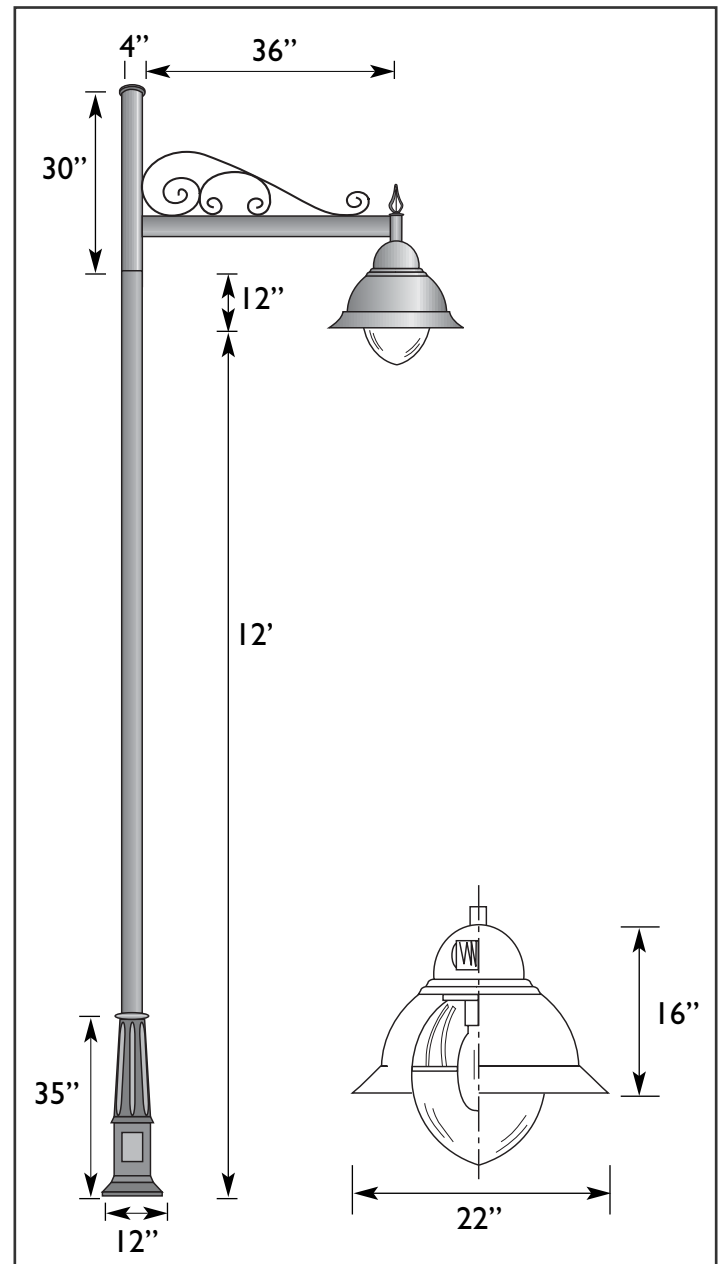

## Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
VK-22	100w/MH = 10H	120	1F = Single Fuse	BZ = Bronze
	150w/MH = 15H	208	2F = Double Fuse	BK = Black
	250w/MH = 25H	240	WM = Wall Mount	WH = White
	100w/HPS = 10S	277	2A = Twin Mount	SL = Silver
	150w/HPS = 15S	480	PDM = Pendant Mount	CC = Custom Color
	250w/HPS = 25S		QR = Quartz Restrict	
			Type 3 = III	
			Type 5 = V	

**Example:** 100 Watt, Metal Halide, 120 Volts, Single Fuse, Type 3, Bronze  
**VK-2210H-120/1F/III/BZ**