

# YRW400 Series



## Design Feature

**Housing:** Heavy gauge extruded aluminum tube forms the cylinder housing. The up and down model housing is 12" tall and the part # is YRW-2-400.


**Lens Assembly:** Clear tempered glass lens is sealed in regressed cast aluminum frame. Optional with frosted glass "FG" or linear spread lens "SL".

**Mounting Bracket:** Extruded aluminum arm is internally welded to cast back plate and housing. Top and bottom cast plates are removable to access the ballast. Steel zinc-plated bracket mounts to wall surface and is attached to the cast plate with two stainless steel fasteners.

**Ballast/Socket:** Electronic ballast with universal voltage operates one or two 39 watt Par20/M130 medium base lamps. Porcelain, pulse-rated medium base sockets are supplied for metal halide and 50w Par20 incandescent lamps. Lamps are supplied by others.

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

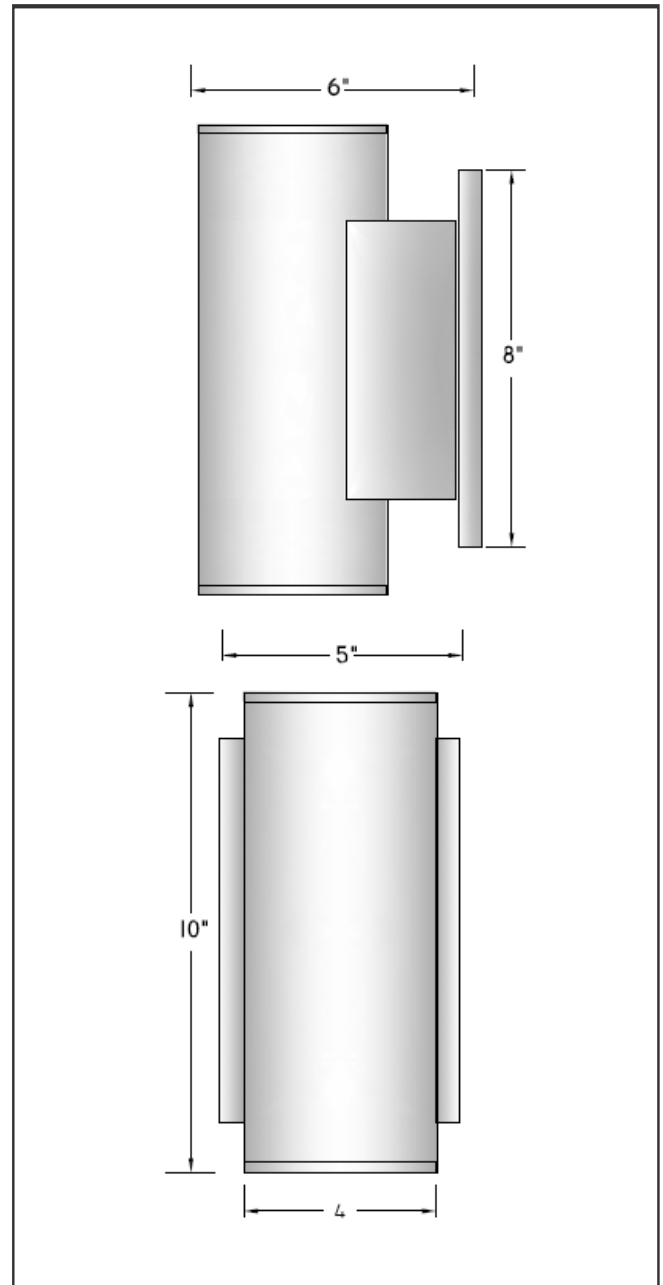

## Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
YRW4 Down only	39w/MH = 403H/P20 50w/INC = 405I/P20	120 UV	FG = Frosted Glass SL = Linear Spread Lens	BZ = Bronze BK = Black WH = White SL = Silver CC = Custom Color
YRW-2-4 Up & Down				

**Example:** Down light only, 39 Watt, MH, Par20, 120, Frosted Glass, Bronze  
**YRW403H-UV-FG/BZ**