

Design Features

Enclosure: One piece 15" seamless high strength polycarbonate cube with rounded corners Cubes are available in clear, smoke and bronze tints. All cubes are UV stabilized for longer life.


Fitter: Heavy duty cast aluminum holder provides strength and durability. Spring loaded retaining brackets secure enclosure to gasketed fitter. Internal stainless steel set screws secure assembly to 3" diameter tenon.

Optical System: Cylindrical glass refractor is available for use with all available enclosures. Specify "RF" when refractor is required.

Ballast/Lamp Assembly: HID ballast shall be high power factor and suitable for -20° F operation. CFL ballast are electronic uni-volt and operate a 26, 32 or 42 watt 4-pin lamp. HID and INC sockets are porcelain, medium base and pulse-rated. CFL sockets are thermoplastic.

Finish: Polyester powder coating on all metal parts. Color to be specified.

Listing: Luminaire is ETL listed for wet locations.

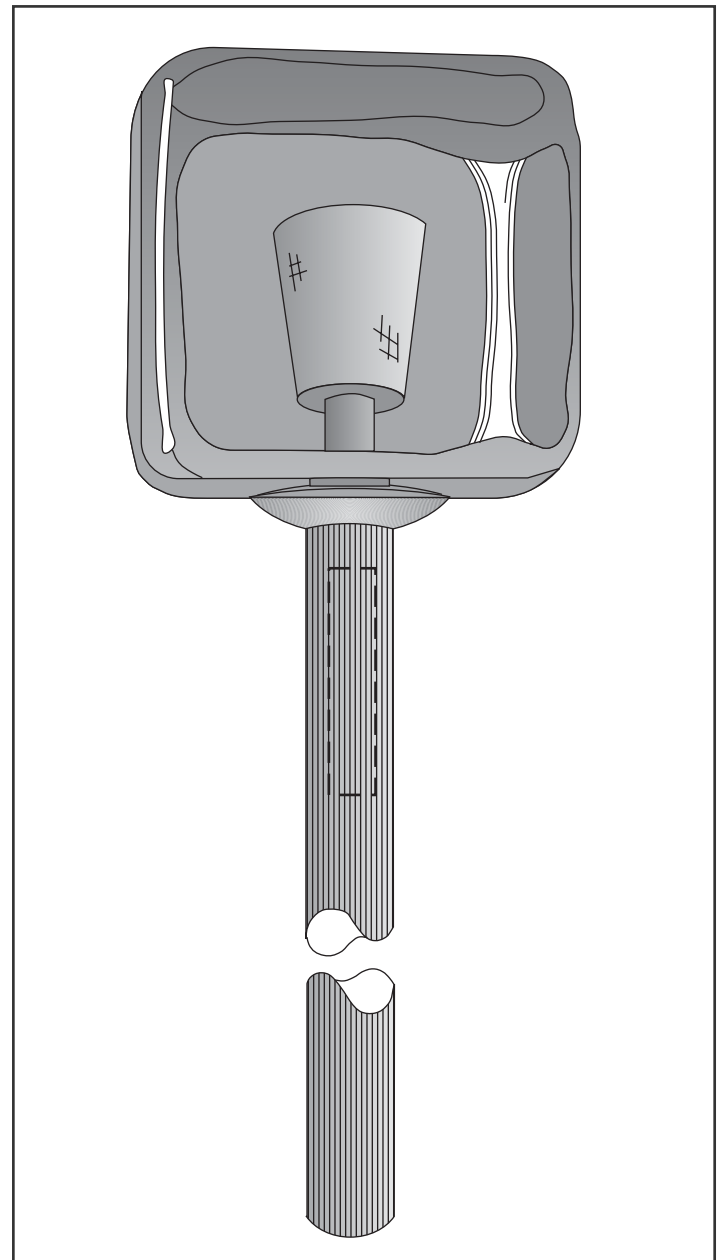

Maximum Lamp Wattage

100w/MH & HPS - 42W/CFL - 150W/INC

Specification Guide

Series	Size	Wattage/Lamp	Volts	Tint	Options	Finish
CU	15"	26-42w/CFL = 42P	120	C = Clear	RF = Refractor	BZ = Bronze
		100w/INC = INC	208	B = Bronze	WM = Wall Mount	BK = Black
		70w/MH = 07H	240	S = Smoke	2A = Twin Assembly	WH = White
		100w/MH = 10H	277		3A = Triple Assembly	SL = Silver
		70w/HPS = 07S	UV		4A = Quad Assembly	CC = Custom Color
		100w/HPS = 10S				

Example: 15" Cube, 100 Watt, High Pressure Sodium, 120 Volts, Clear, Wall Mount, Black
CU-1510S-120/C/WM/BK