

## Design Features

**Housing:** Heavy gauge cast aluminum housing is designed for recessed dry or concrete pour applications. Housing is provided with two wire entry holes. Specify 1/2" or 3/4" NPT. Neoprene gasket is installed between housing and face-plate.



**Lens Plate:** Rugged cast aluminum face-plate with 45° louvers, secures clear tempered glass. Face-plate is secured to housing with two stainless tamper proof fasteners.

**Optical System:** Diffused satin aluminum reflector provides asymmetric distribution.

**Ballast/Lamp Assembly:** HID ballast are high power factor and suitable for -20° operation. CFL ballast are electronic with universal voltage and operate a 26, 32 or 42 watt 4-pin lamp. HID sockets are porcelain, medium base and pulse-rated. CFL sockets are thermoplastic. Optional with emergency ballast "EMB".

**Finish:** Polyester powder coating on all metal parts. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

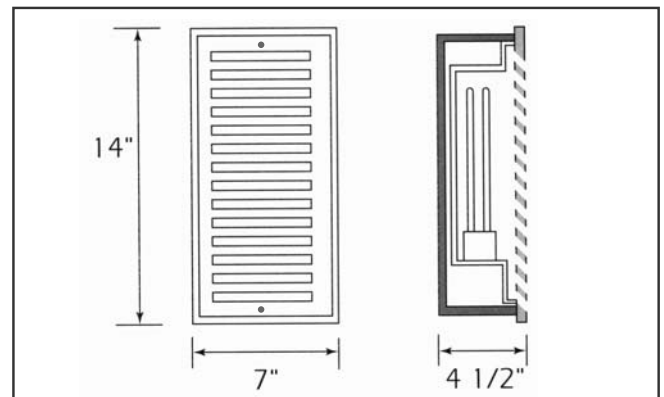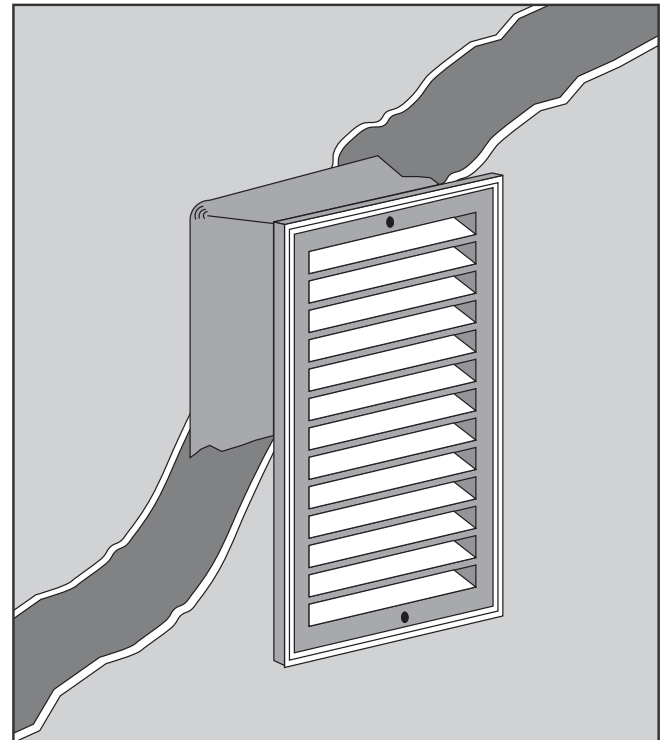

## Specification Guide

Series	Wattage/Lamp	Volts	Options	Finish
CF	26w/PLQ = 126P	120	IF = Single Fuse	BZ = Bronze
	32w/PLT = 132P	208	2F = Double Fuse	BK = Black
	42w/PLT = 142P	240	QR = Quartz Relay	WH = White
	50w/MH = 105H	277	EMB = Emerg. Ballast	SL = Silver
	70w/MH = 107H	UV		CC = Custom Color
	70w/HPS = 107S			
	50w/HPS = 105S			

**Example:** 50 Watt, Metal Halide, 120 Volts, Single Fuse, Bronze  
**CF-105H-120/IF/BZ**