
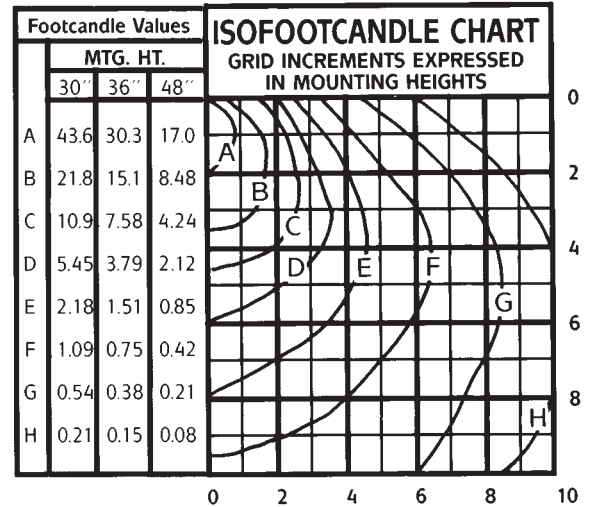


Photometric Data Type "LR" Distribution

*A below-eye-level, very wide forward distribution with cutoff
for wall mounted applications.*

- 100 Watt High Pressure Sodium
- Rated Initial Lumens of 9,500

- 100 Watt Metal Halide
- Rated Initial Lumens of 7,200


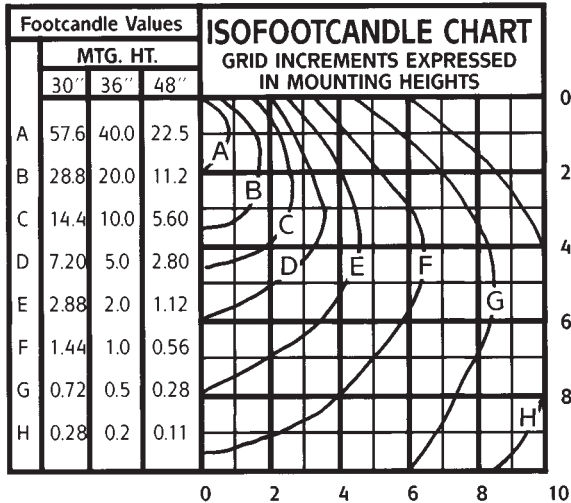


Type "SR/SL" Distribution

*An asymmetric distribution with left or right downward light deflection
designed for stairway applications.*

- 100 Watt High Pressure Sodium
- Rated Initial Lumens of 9,500

- 100 Watt Metal Halide
- Rated Initial Lumens of 7,200

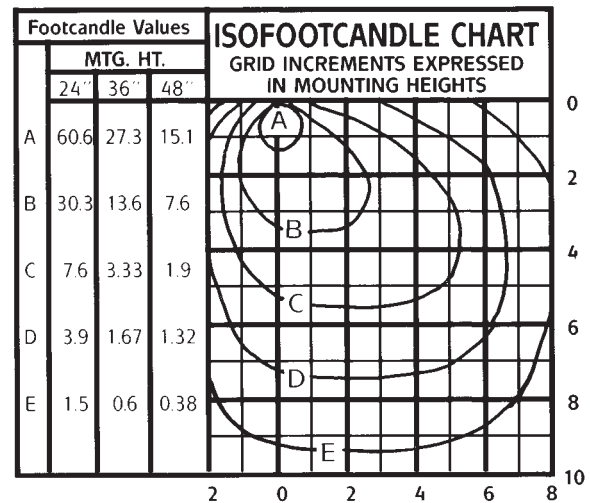
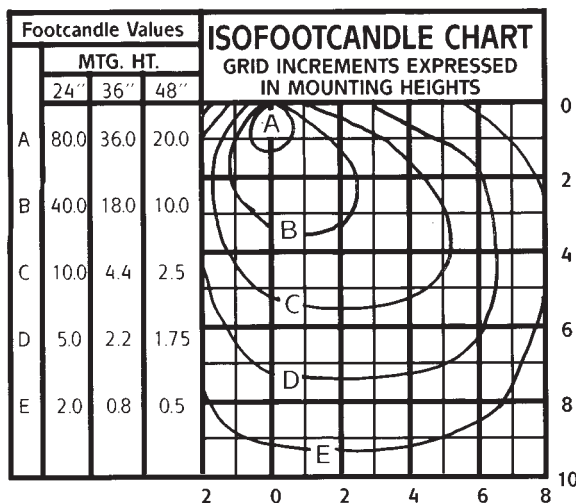


Photometric Data Type "R" Distribution

An above-eye-level, wide distribution cutoff floodlight for wall or pole mounted applications.

- 100 Watt High Pressure Sodium
- Rated Initial Lumens of 9,500

- 100 Watt Metal Halide
- Rated Initial Lumens of 7,200

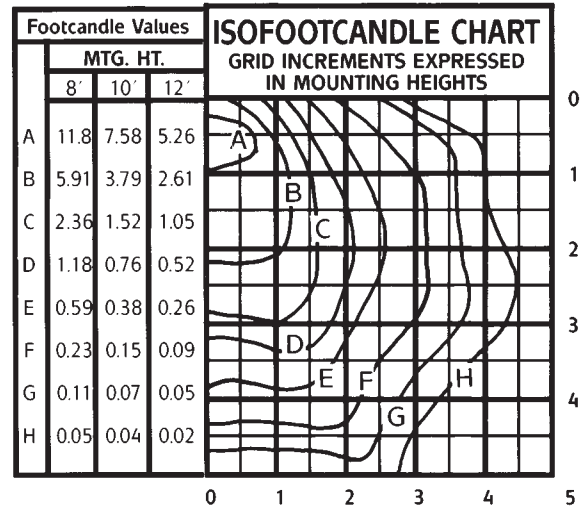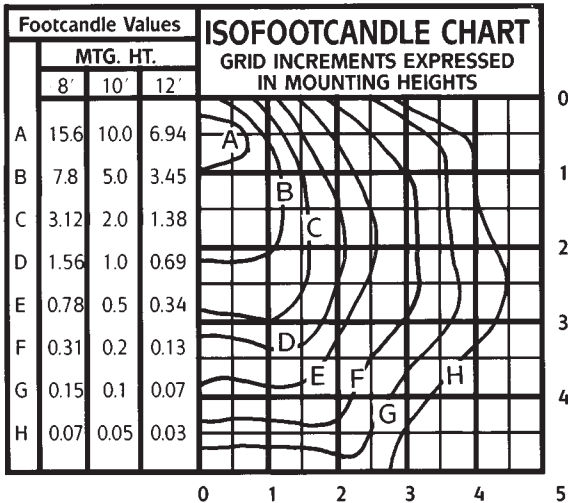

Type "LW" Distribution

A below-eye-level, elongated distribution with sharp cutoff for wall mounted applications

- 100 Watt High Pressure Sodium
- Rated Initial Lumens of 9,500

- 100 Watt Metal Halide
- Rated Initial Lumens of 7,200

