

## Features and Characteristics

Alumilite designs reliable products produced with the best available materials, and we stand behind them with superior customer service. Please contact us for more information.

**Housing:** Heavy gauge cast aluminum housing is designed for recessed dry or concrete pour applications or surface mounting to wall. Neoprene gasket is installed between housing and lens. The unit is fed electrically through the housing.

**Lens Assembly:** One-piece injection-molded U.V. stabilized polycarbonate lens with vertical prisms on the interior surface. Lens is secured to housing by means of four captive stainless steel tamperproof fasteners.


**Module/Driver:** LED Module is a TerraLux linear fully integrated unit with patented Thermal Management Technology to provide maximum light output at all times. Drivers are 0-10v dimming and have Universal Voltage. Modules are IP-65 rated and have a 5-year warranty. L70 = 60,000hr. Available in forward throw, wide throw, stair left and stair right distributions. Wattages range from 8 to 30 watt (2) 15 engines.

### Characteristics:

Color	Watts	Lumens	Efficacy (lm/W)
2700k	8/13/15	390/575/725	49/50/56
3000k	8/13/15	430/650/800	54/57/62
3500k	8/13/15	430/650/800	54/57/59
4000k	8/13/15	459/700/860	57/61/66

**Finish:** Polyester powder coating on all metal parts. Color to be specified. Color to be specified.

**Listing:** Luminaire is ETL listed for wet locations.

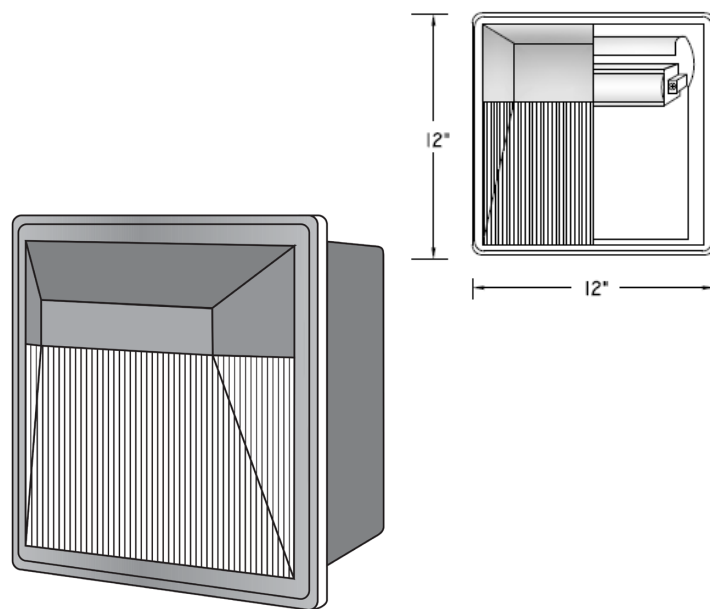

## Specifications

Series	Wattage/Lamp	Volts	Reflector
CD	8w/LED=108/LED	UV 120-277	WT=Wide Throw
CD	13w/LED=113/LED	UV 120-277	FT=Forward Throw
CD	15w/LED=115/LED	UV 120-277	SL=Stair Left
CD	26w/LED=126/LED	UV 120-277	SR=Stair Right
CD	30w/LED=130/LED	UV 120-277	

Options	Finish
27k = 2700k	BZ = Bronze
30k = 3000k	BK = Black
35k = 3500k	WH = White
40k = 4000k	SL = Silver
DC = Direct Conduit Entry	CC = Custom Color
PP = Pedestal Mount	
PF = Plaster Frame	
CP = Cover Plate (concrete pour)	

## Example

26 Watt, 120 Volt, Stair Left Distribution, 3500k, Bronze  
CD126/LED-UV/SL/35k/BZ